




nexyn
corporation


Best PLDRO Performance and Reliability

Our PLDRO products excel in phase-noise with excellent immunity to microphonics. Designed to operate in outdoor environments with high reliability.

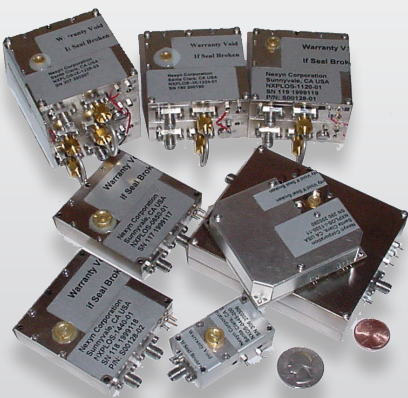

- Crystal reference phase noise to $-138\text{dBc}/\text{Hz}$ @ $100\text{Hz}\sim 100\text{MHz}$
- Dual loop output frequency resolution $\pm 0.001\text{Hz}$
- Internal reference stability to ± 10 ppb
- $5\sim 1000$ MHz external reference
- Frequency range of 10 MHz to 40 GHz
- Power Output from $+10$ to $+24$ dBm
- Wide operating temperature (-55°C to $+85^\circ\text{C}$)
- Spurious: < -90 dBc

Residual PN 12GHz PLDRO Ref 125MHz

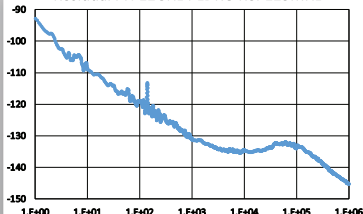

**Speak to an engineer
today about your
custom requirements**

*Delivering Low-Phase-Noise
Fixed-Frequency Sources since 1998*

Nexyn Corporation

www.nexyn.com | (408) 962-0895 | sales@nexyn.com